


The testing data you are about to view is provided for informational purposes only. No warranty is expressed or implied regarding the characteristics of these products. The gradation of the products and their physical / mineralogical properties may vary over time. The test results represent measured properties from typical samples, and should not be used for engineering design. Samples of the materials are available upon request for additional independent confirmation.

The percent moisture data viewed below pertains specifically to the Standard Proctor test for purposes of characterizing moisture-density relationships, and does not represent water contents of products purchased from the mine.

| PROCTOR SUMMARY LOG | | | SUMMARY OF TEST RESULTS | |
|---------------------|--------------|-------------------|---------------------------------|------|
| | Moisture (%) | Dry Density (pcf) | Standard Proctor Test ASTM D698 | |
| Point 1 | 9.5 | 102.6 | Method A | |
| Point 2 | 10.5 | 105.4 | Maximum Dry Density (pcf): | 108 |
| Point 3 | 12.3 | 108.0 | Optimum Moisture Content (%): | 12.3 |
| Point 4 | 15.1 | 105.9 | Lab ID Number: | 2 |

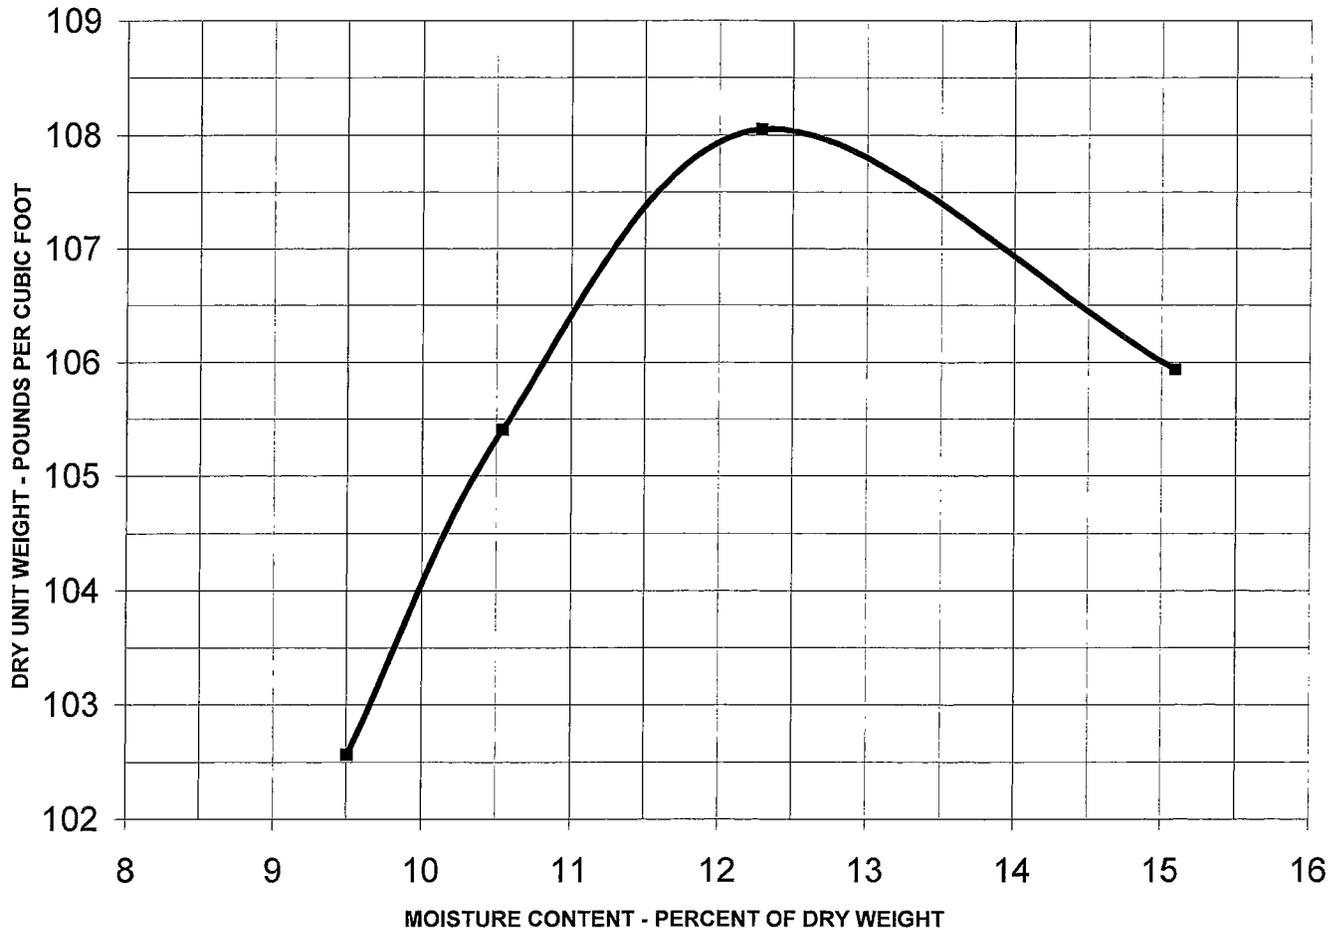

| | | | |
|-----------------------------|---------------|--|--|
| Sample Location: | Haines City | MOISTURE - DENSITY RELATIONSHIP | |
| | | Sand Mine Product Testing | |
| Sample Description: | Concrete Sand | E.R Jahna | |
| USCS Classification: | SP | Project No: LKL-08-0003 | |
| Retained on No.4 Sieve (%): | 0.0 | Tested By: AG | |
| Passing No. 200 Sieve (%): | 0.3 | Checked By: TS | |

DUNKELBERGER
engineering & testing, inc.

JA Beriswill
Jeffery A. Beriswill
Director, Dams & Water Resources
License Number No 41823